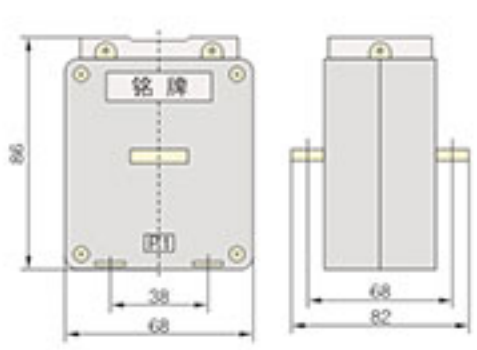
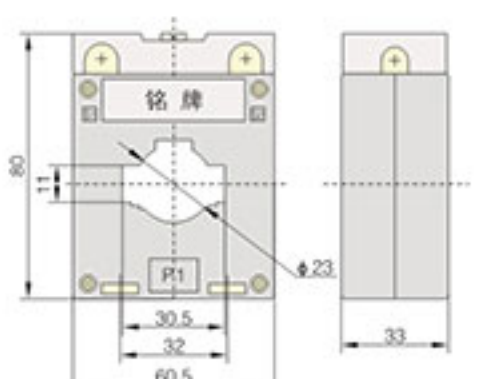


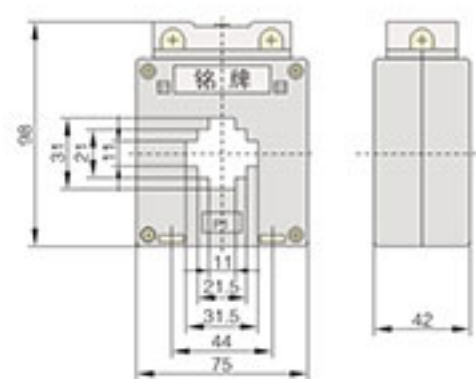
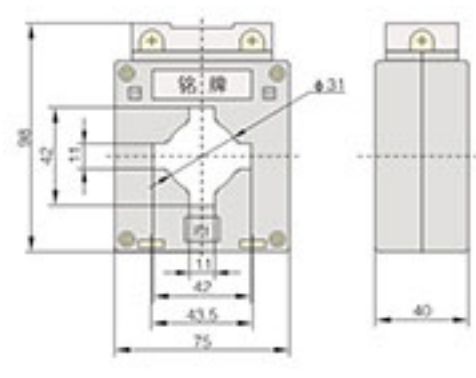
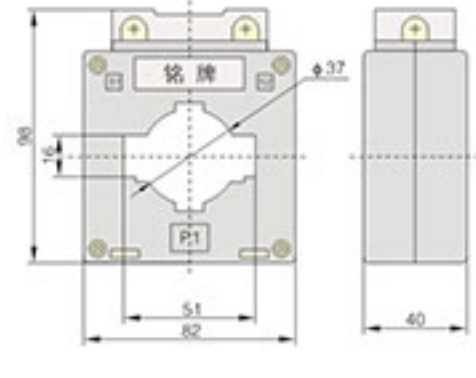
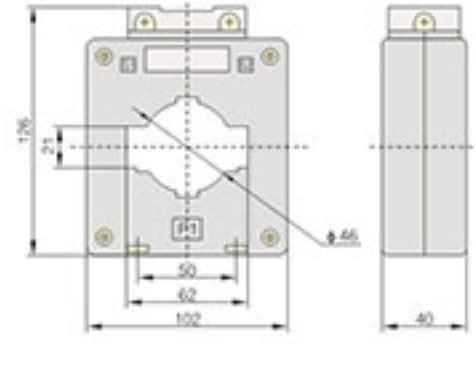
技术参数 Technical data

- 产品性能符合标准 GB1208和IEC60044-1
The current transformers are in accordance with GB1208 and IEC60044-1 standards
- 额定电压: 0.66kV
Rated voltage 0.66kV
- 额定频率50Hz或60Hz
Rated frequency 50Hz or 60Hz
- 额定二次电流: 5A或1A
Rated secondary current 5A or 1A
- 环境温度: -5°C~+40°C
Ambient temperature -5°C~+40°C

上海互凌电气

主要技术参数及外形安装尺寸 The main technical parameters and dimensions

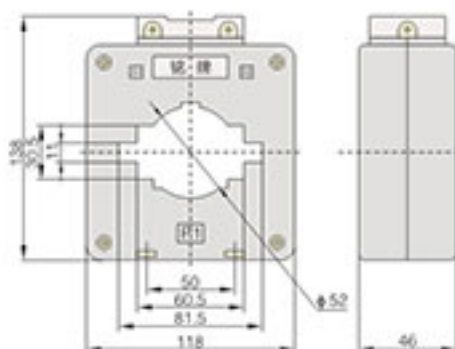
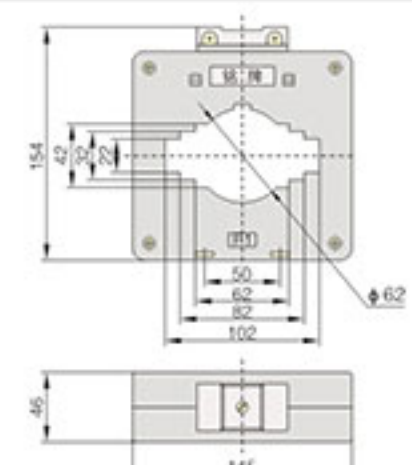
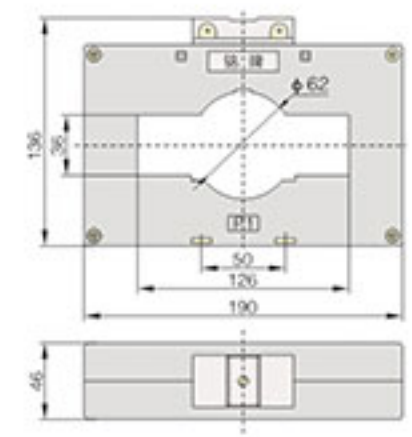
产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)					穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)
		Class:3.0	1.0	0.5	0.5S	0.2		
LMK(BH)-0.66-30 I (实心)	5/5			5				
	10/5			5				
	15/5			5				
	20/5			5				
	25/5			5				
	30/5			5				
	40/5			5				
	50/5			5				
	75/5			5				
	LMK(BH)-0.66-20 I	10/5		2.5			10	
15/5			2.5			5		
20/5				2.5		5		
25/5				2.5		4		
30/5				2.5		4		
40/5				2.5		3		
50/5			5	2.5		2		
75/5			5	2.5		2		
LMK(BH)-0.66-30 I	30/5		5	2.5		5		
	40/5		5	5		5		
	50/5		5	2.5		3		
	50/5	2.5				1		
	75/5		5	2.5		2		
	75/5		2.5			1		
	100/5		5	5		2		
	100/5		2.5			1		
	150/5		5	2.5		1		
	200/5		5	5		1		
	250/5		5	5		1		
	300/5		5	5		1		
400/5		5	5		1			

产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)					穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)
		Class:1.0	0.5	0.5S	0.2	0.2S		
LMK(BH)-0.66-30B	30/5			5	5		5	
	40/5			5	5	5	5	
	50/5			5	5	5	3	
	75/5			5	5	5	2	
	100/5			5	5	5	2	
	150/5			5	5	5	1	
	200/5			5	5	5	1	
	250/5			5	5	5	1	
	300/5			5	5	5	1	
	400/5			5	5	5	1	
LMK(BH)-0.66-40 I	30/5	5	2.5				5	
	40/5	5	2.5				5	
	50/5	5	2.5				3	
	75/5	5	2.5				2	
	100/5	5	2.5				1	
	150/5	5	2.5	5	5	5	1	
	200/5	5	2.5	5	5	5	1	
	250/5	5	2.5	5	5	5	1	
	300/5		5	5	5	5	1	
	350/5		5	5	5	5	1	
400/5		5	5	5	5	1		
500/5		5	5	5	5	1		
600/5		10	5	5	5	1		
750/5		10	10	10	10	1		
800/5		10	10	10	10	1		
LMK(BH)-0.66-50 I	150/5	2.5	1				1	
	200/5	5	5	5	5		1	
	250/5	5	5	5	5		1	
	300/5	5	5	5	5		1	
	400/5	5	5	5	5		1	
	500/5	5	5	5	5		1	
	600/5	10	5	5	5		1	
	750/5	10	10	10	10		1	
	800/5	10	10	10	10		1	
	1000/5	10	10	10	10		1	
LMK(BH)-0.66-60 I	200/5	5	2.5				1	
	250/5	5	2.5				1	
	300/5	5	5	5	5		1	
	400/5	5	5	5	5		1	
	500/5	5	5	5	5		1	
	600/5	10	5	5	5		1	
	750/5	10	10	10	10		1	
	800/5	10	10	10	10		1	
	1000/5	10	10	10	10		1	
	1200/5	15	15	15	15		1	
1500/5	15	15	15	15		1		
2000/5	20	20	20	20		1		
2500/5	25	25	25	25		1		

上海互凌电气

021-31263351

www.ddg.cc

产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)					穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)
		Class:1.0	0.5	0.5S	0.2	0.2S		
LMK(BH)-0.66-80 I	400/5	5	2.5				1	
	500/5	5	2.5				1	
	600/5		5	5	5	5	1	
	750/5		10	10	10	10	1	
	800/5		10	10	10	10	1	
	1000/5		10	10	10	10	1	
	1200/5		10	10	10	10	1	
	1500/5		15	15	15	15	1	
	2000/5		20	20	20	20	1	
	2500/5		25	25	25	25	1	
LMK(BH)-0.66-100 I	500/5	5	2.5				1	
	600/5	5	5	5	5	5	1	
	750/5	5	5	5	5	5	1	
	800/5	10	10	10	10	10	1	
	1000/5	15	15	15	15	15	1	
	1200/5	15	15	15	15	15	1	
	1500/5	15	15	15	15	15	1	
	2000/5	20	20	20	20	20	1	
	2500/5	25	25	25	25	25	1	
	3000/5	30	30	30	30	30	1	
LMK(BH)-0.66-120 I	800/5		10	10	10	10	1	
	1000/5		15	15	15	15	1	
	1200/5		15	15	15	15	1	
	1500/5		15	15	15	15	1	
	2000/5		20	20	20	20	1	
	2500/5		25	25	25	25	1	
	3000/5		30	30	30	30	1	
	3500/5		30	30	30	30	1	
	4000/5		40	40	40	40	1	
	4500/5		40	40	40	40	1	
5000/5		40	40	40	40	1		

订货须知 Ordering Instructions

用户在订货时，需提供以下信息：

- 产品型号及窗口宽度；
- 额定电流比；
- 额定输出及相应准确级；

例如：订货BH-0.66 I 型，窗口宽度为30mm，额定电流比200/5A、额定输出5VA、准确级0.5级的互感器。

订货代号为：BH-0.66 30 I 200/5A 1 5VA 0.5级。

- 如有特殊要求时，可与厂家协商定制。

When the customer ordering, need to provide the following information:

- the product model and window width;
- rated current ratio;
- rated output and the corresponding accuracy class;

For example: order BH-0.66 I type, window width is 30mm, rated current, rated output than 200/5A 5VA, accuracy class 0.5 grade transformer.

Ordering code named: BH-0.66 30 I 200/5A 1 5VA 0.5 level turn.

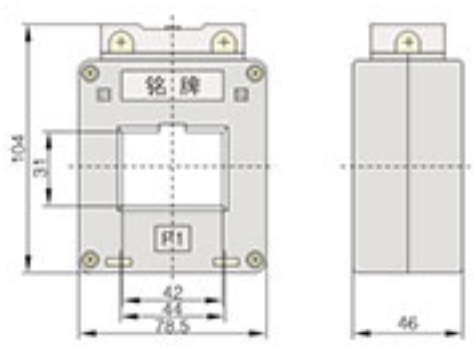
- if there are special requirements, can consult with the manufacturers custom.

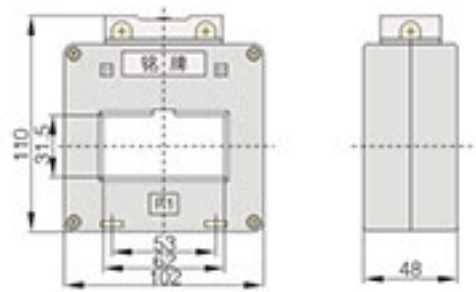
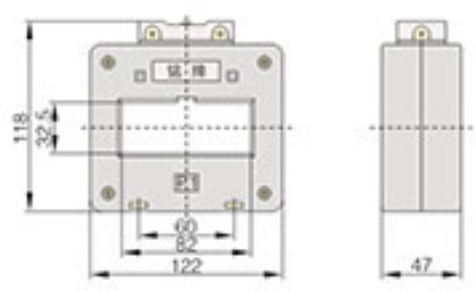
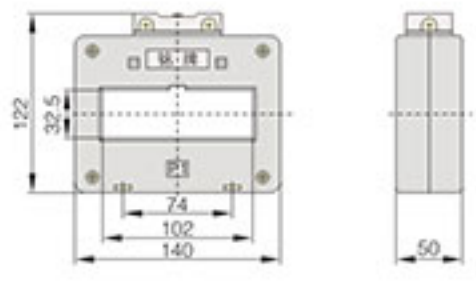
技术参数 Technical data

- 产品性能符合标准 GB1208和IEC60044-1
The current transformers are in accordance with GB1208 and IEC60044-1 standards
- 额定电压: 0.66kV
Rated voltage 0.66kV
- 额定频率50Hz或60Hz
Rated frequency 50Hz or 60Hz
- 额定二次电流: 5A或1A
Rated secondary current 5A or 1A
- 环境温度: -5°C~+40°C
Ambient temperature -5°C~+40°C

上海互凌电气

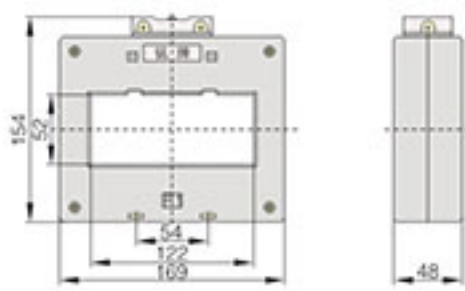
主要技术参数及外形安装尺寸 The main technical parameters and dimensions

产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)					穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)
		Class:1.0	0.5	0.5S	0.2	0.2S		
LMK(BH)-0.66-40 II	30/5	5	2.5				5	
	40/5	5	2.5				5	
	50/5	5	2.5				3	
	75/5	5	2.5				2	
	100/5	5	2.5				1	
	150/5	5	5	5	5	5	1	
	200/5	5	5	5	5	5	1	
	250/5		5	5	5	5	1	
	300/5		5	5	5	5	1	
	350/5		5	5	5	5	1	
	400/5		5	5	5	5	1	
	500/5		5	5	5	5	1	
	600/5		10	5	5	5	1	
	800/5		10	10	10	10	1	
	LMK(BH)-0.66-50 II	150/5	2.5	1				
200/5			5	5	5	5	1	
250/5			5	5	5	5	1	
300/5			5	5	5	5	1	
400/5			5	5	5	5	1	
500/5			5	5	5	5	1	
600/5			10	5	5	5	1	
750/5			10	10	10	10	1	
800/5			10	10	10	10	1	
1000/5			10	10	10	10	1	

产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)					穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)
		Class:1.0	0.5	0.5S	0.2	0.2S		
LMK(BH)-0.66-60 II	200/5	5	2.5				1	
	250/5	5	2.5				1	
	300/5		5	5	5	5	1	
	400/5		5	5	5	5	1	
	500/5		5	5	5	5	1	
	600/5		10	5	5	5	1	
	750/5		10	10	10	10	1	
	800/5		10	10	10	10	1	
	1000/5		10	10	10	10	1	
	1200/5		15	15	15	15	1	
LMK(BH)-0.66-80 II	400/5	5	2.5				1	
	500/5	5	2.5				1	
	600/5		5	5	5	5	1	
	750/5		10	10	10	10	1	
	800/5		10	10	10	10	1	
	1000/5		10	10	10	10	1	
	1200/5		10	10	10	10	1	
	1500/5		15	15	15	15	1	
	2000/5		20	20	20	20	1	
	2500/5		20	20	20	20	1	
LMK(BH)-0.66-100 II	500/5	5	2.5				1	
	600/5		5	5	5	5	1	
	750/5		5	5	5	5	1	
	800/5		10	10	10	10	1	
	1000/5		15	15	15	15	1	
	1200/5		15	15	15	15	1	
	1500/5		15	15	15	15	1	
	2000/5		20	20	20	20	1	
	2500/5		25	25	25	25	1	
	3000/5		30	30	30	30	1	

上海互凌电气

021-31263351
www.ddg.cc

产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)				穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)
		Class:0.5	0.5S	0.2	0.2S		
LMK(BH)-0.66-120 II	800/5	10	10	10	10	1	
	1000/5	15	15	15	15	1	
	1200/5	15	15	15	15	1	
	1500/5	15	15	15	15	1	
	2000/5	20	20	20	20	1	
	2500/5	25	25	25	25	1	
	3000/5	30	30	30	30	1	
	3500/5	30	30	30	30	1	
	4000/5	40	40	40	40	1	
	4500/5	40	40	40	40	1	
LMK(BH)-0.66-150 II	1000/5	10	10	10	10	1	
	1200/5	15	15	15	15	1	
	1500/5	15	15	15	15	1	
	2000/5	20	20	20	20	1	
	2500/5	25	25	25	25	1	
	3000/5	30	30	30	30	1	
LMK(BH)-0.66-200 II	1200/5	15	15	15	15	1	
	1500/5	15	15	15	15	1	
	2000/5	20	20	20	20	1	
	2500/5	25	25	25	25	1	
	3000/5	30	30	30	30	1	
	4000/5	40	40	40	40	1	
5000/5	40	40	40	40	1		

订货须知 Ordering Instructions

用户在订货时，需提供以下信息：

- 产品型号及窗口宽度；
- 额定电流比；
- 额定输出及相应准确级；

例如：订货BH(SDH)-0.66 II 型，窗口宽度为40mm，
额定电流比200/5A、额定输出5VA、准确级0.5级
的互感器。

订货代号为：BH(SDH)-0.66 40 II 200/5A 5VA 0.5级。

- 如有特殊要求时，可与厂家协商定制。

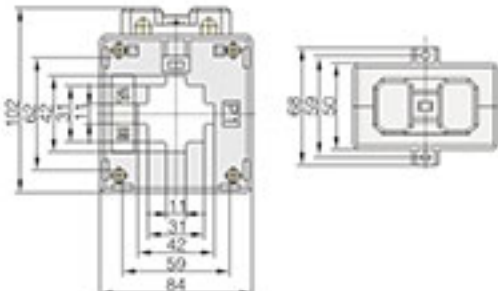
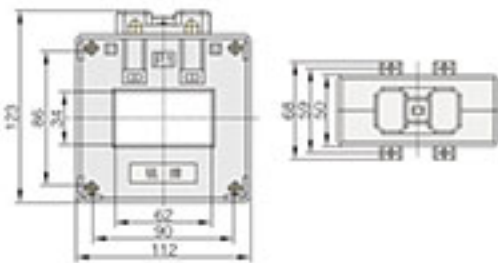
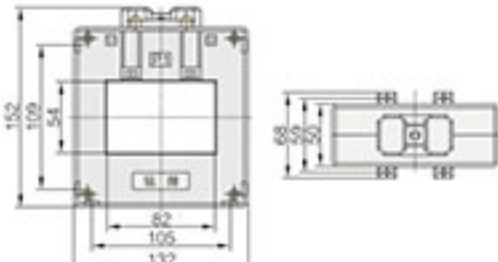
When the customer ordering, need to provide the following information:

- the product model and window width;
- rated current ratio;
- rated output and the corresponding accuracy class;

For example: order BH(SDH)-0.66 II type, window width is 40mm,
rated current, rated output than 200/5A 5VA, accuracy
class 0.5 grade transformer.

Ordering code named: BH(SDH)-0.66 40 II 200/5A 1 5VA 0.5 level turn.

- if there are special requirements, can consult with the manufacturers
custom.

产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)				穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)
		Class:0.5	0.5S	0.2	0.2S		
LMK(BH)-0.66-40Ⅲ	150/5	5	5	5	5	1	
	200/5	5	5	5	5	1	
	250/5	5	5	5	5	1	
	300/5	5	5	5	5	1	
	400/5	5	5	5	5	1	
	500/5	5	5	5	5	1	
	600/5	10	5	5	5	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	LMK(BH)-0.66-50Ⅲ	300/5	5	5	5	5	
400/5		5	5	5	5	1	
500/5		5	5	5	5	1	
600/5		10	5	5	5	1	
750/5		10	10	10	10	1	
800/5		10	10	10	10	1	
LMK(BH)-0.66-60Ⅲ	500/5	5	5	5	5	1	
	600/5	10	5	5	5	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1500/5	15	15	15	15	1	
LMK(BH)-0.66-80Ⅲ	500/5	5	5	5	5	1	
	600/5	10	5	5	5	1	
	750/5	10	10	10	10	1	
	800/5	10	10	10	10	1	
	1000/5	10	10	10	10	1	
	1200/5	15	15	15	15	1	
	1500/5	15	15	15	15	1	
	2000/5	20	20	20	20	1	
2500/5	25	25	25	25	1		

上海互凌电气

021-31263351

www.ddg.co

产品型号 Product Model	电流比 Ratio(A)	额定负荷 Burden(VA)				穿心匝数 Cross-core turn number	外形及安装尺寸 Outline and mounting dimensions(mm)		
		Class:0.5	0.5S	0.2	0.2S				
LMK(BH)-0.66-100Ⅲ	800/5	10	10	10	10	1			
	1000/5	10	10	10	10	1			
	1200/5	15	15	15	15	1			
	1500/5	15	15	15	15	1			
	2000/5	20	20	20	20	1			
	2500/5	25	25	25	25	1			
	3000/5	30	30	30	30	1			
	LMK(BH)-0.66-120Ⅲ	1000/5	10	10	10	10		1	
		1200/5	15	15	15	15		1	
		1500/5	15	15	15	15		1	
2000/5		20	20	20	20	1			
2500/5		25	25	25	25	1			
3000/5		30	30	30	30	1			
4000/5		40	40	40	40	1			
5000/5		40	40	40	40	1			

订货须知 Ordering Instructions

用户在订货时，需提供以下信息：

- 产品型号及窗口宽度；
- 额定电流比；
- 额定输出及相应准确级；

例如：订货BH-0.66Ⅲ型，窗口宽度为30mm，额定电流比200/5A、额定输出5VA、准确级0.5级的互感器。

订货代号为：BH-0.66 30Ⅲ 200/5A 5VA 0.5级。

- 如有特殊要求时，可与厂家协商定制。

When the customer ordering, need to provide the following information:

- the product model and window width;
- rated current ratio;
- rated output and the corresponding accuracy class;

For example: order BH-0.66Ⅲ type, window width is 30mm, rated current, rated output than 200/5A 5VA, accuracy class 0.5 grade transformer.

Ordering code named: BH-0.66Ⅲ 30 200/5A 5VA 0.5.

- if there are special requirements, can consult with the manufacturers custom.